"SPEED CONTROL" REWINDING BRAKE

No. 223-SC



ADVANCED FLUID
MANAGEMENT SOLUTIONS







ADVANCED FLUID MANAGEMENT SOLUTIONS

Edutomaticrewinding



















...discover the "Speed control" strength points





"SPEED CONTROL"

REWINDING BRAKE



STRENGTH POINTS



SLOWED REWINDING

The Speed Control brake reduces the rewinding speed in case of accidental hose release. For this reason, it is possible for the operators to work in safer conditions avoiding unexpected breakages of the tools connected with the hose.



STURDY

Designed with black high resistance techno-polymer cover tested to withstand the impacts.



IP65

Entirely waterproof with IP65 protection degree.



STAINLESS STEEL

The stainless steel hose reel connection pin and screws are suitable for corrosive working environments.



5 MINUTES ASSEMBLY

Easy assembly both on new and already used models. The valued assembly time is only 5 minutes.



AVAILABLE FOR S. 430-530-540-560

Available for all RAASM open hose reels series 430, 530, 540 and 560, in ABS, painted or stainless steel*.

* Hose reels for welding, GPL and methane and dual inlet-outlet are not available with "Speed Control".

TECHNICAL

CHARACTERISTICS

Visit our website



MOLDED SEAL

to guarantee the IP65 protection degree.

SHOCKPROOF COVER

in black high resistance techno-polymer.

FIXING SCREWS

in stainless steel.







BRAKING SYSTEM created and designed

by RAASM.

Helpful hint



The "Speed Control" components are not consumable and have a long lifetime. RAASM suggests to lubricate the internal gears once a year as indicated in the instruction manual.






"SPEED CONTROL" REWINDING BRAKE

The new RAASM brake is designed to control the hose rewinding speed in the series 430, 530, 540 and 560 of all the open hose reels (included the swivelling version, the ABS and painted or stainless steel models)*.

The "Speed Control", thanks to an easy and fast assembly, is usable everywhere and from any operator. It guarantees a controlled and safety rewinding speed in case of accidental hose release.




* Hose reels for welding, GPL and methane and dual inlet-outlet are not available with "Speed Control".

⚠ The hose reel equipped with "Speed Control" is not suitable for installation in potentially explosive atmosphere

P/N **843020**

"Speed Control" rewinding brake

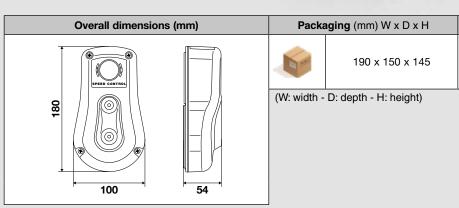



Weight

1,25 kg

"SPEED CONTROL"

HOW TO INSTALL THE BRAKE





In the suitable open **series 430** the **"Speed Control"** can be mounted in the following positions:












In the suitable open **series 530, 540 and 560** the **"Speed Control"** can be installed as you like in the following three positions:



















Technology

The research and development of cutting-edge solutions, carried out entirely in Italy, is the starting point for the entire production cycle.



Quality

Offering high-quality products is one of our main objectives. Specific and rigorous tests accompany every single stage of the production process.



Efficiency

RAASM offers a complete range of fluid management solutions suitable for many different sectors of use. Our success is founded on the ability to identify and satisfy the specific needs of our customers.







Company with an ISO 9001:2015 certified quality management system

RAASM S.p.A. 36022 S. ZENO DI CASSOLA (VI) Via Marangoni, 33 - ITALY

Export department

Tel. +39 0424 571130 - Fax +39 0424 571135

Technical department

Tel. +39 0424 571150 - Fax +39 0424 571155

info@raasm.com - www.raasm.com











WRV223SC-GB

Authorized dealer